

# 6040 R5 NARROW PASTRY



## COLORS

|     |        |          |          |             |             |             |             |             |
|-----|--------|----------|----------|-------------|-------------|-------------|-------------|-------------|
| RAL | SILVER | PANNA    | CHOCHO   | AZZURRO     | IL MONE     | LIME        | AMARENA     | PESCA       |
| RAL | SILVER | RAL 9010 | RAL 8014 | PANTONE 285 | PANTONE 394 | PANTONE 383 | PANTONE 233 | PANTONE 165 |

## FEATURES



## DISPLAY TANK

|     |     |              |           |           |
|-----|-----|--------------|-----------|-----------|
| RAL | S/S | WHITE CORIAL | BLACK HPL | WHITE HPL |
|-----|-----|--------------|-----------|-----------|



6040

The outlook of the new R5 upper glass structure is the same of a welded glass structure without metal profiles. There is a double opening of glasses: the top glass can be lifted while the front glass tilts down. The structure is completed by a led light canopy and the front glass can be heated upon request. Molded heat-insulated tank coated by AISI 304 s/s, ventilated refrigeration with finned evaporator and thermostatic valve, lift-up mechanism for the display plate and the evaporator with gas pistons as a guarantee of the perfect cleaning of the tank, s/s perimetral top, temperature display, digital control panel, stainless steel adjustable feet, gray galvanized-steel frame support, under-tank counter in plastic-coated steel.

**CIAM**  
REFRIGERATION DESIGN

# 6040 R5 NARROW PASTRY

## SECTIONS AND MODELS

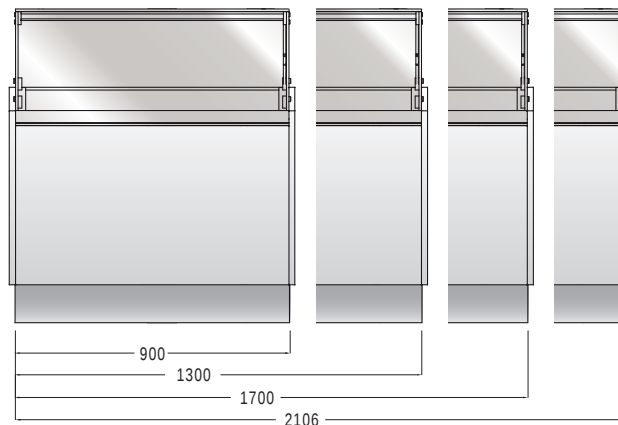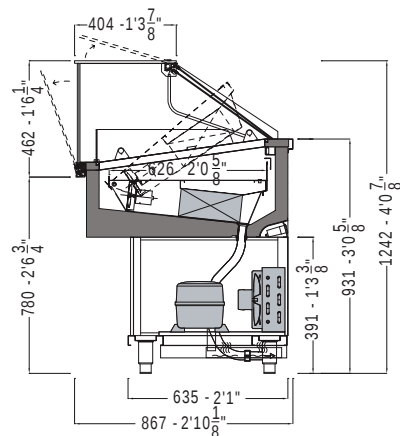

### 6040 R5 - NARROW PASTRY

| TECHNICAL FEATURE           |                 | VERSIONS                                  |                                       |                                           |                                           |
|-----------------------------|-----------------|-------------------------------------------|---------------------------------------|-------------------------------------------|-------------------------------------------|
|                             |                 | 900                                       | 1300                                  | 1700                                      | 2106                                      |
| External dimensions (L-D-H) | inches<br>mm    | 900 - 867 - 1242                          | 1300 - 867 - 1242                     | 1700 - 867 - 1242                         | 2106 - 867 - 1242                         |
| Crated dimensions (L-D-H)   | inches<br>mm    | 43 1/3" - 51 1/8" - 59"<br>1100-1300-1500 | 59" - 51 1/8" - 59"<br>1500-1300-1500 | 74 3/4" - 51 1/8" - 59"<br>1900-1300-1500 | 90 1/2" - 51 1/8" - 59"<br>2300-1300-1500 |
| Refrigeration               | Type            | Fan Ventilated                            | Fan Ventilated                        | Fan Ventilated                            | Fan Ventilated                            |
| Refrigerated display area   | Type            | Deck                                      | Deck                                  | Deck                                      | Deck                                      |
| Operating temperature       | °C / °F         | +4 / 39.2                                 | +4 / 39.2                             | +4 / 39.2                                 | +4 / 39.2                                 |
| Compressor                  | nr. / Type      | 1 / hermetic                              | 1 / hermetic                          | 1 / hermetic                              | 1 / hermetic                              |
| Cooling power *             | (W)             | 380                                       | 550                                   | 690                                       | 850                                       |
| Electric supply             | (V/ph/Hz)       | 230/1/50 (UE)<br>120/1/60 (USA)           | 230/1/50 (UE)<br>120/1/60 (USA)       | 230/1/50 (UE)<br>120/1/60 (USA)           | 230/1/50 (UE)<br>120/1/60 (USA)           |
| Power consumption           | (W/A)           | 565/3,5                                   | 680/4,0                               | 885/4,5                                   | 1000/6,0                                  |
| Defrost                     | Mode / type     | automatic                                 | automatic                             | automatic                                 | automatic                                 |
| Climatic class              | N°/°C (F°)/H.R. | 4/35 (95)/55%                             | 4/35 (95)/55%                         | 4/35 (95)/55%                             | 4/35 (95)/55%                             |
| Refrigerant Gas             | Type            | R452A                                     | R452A                                 | R452A                                     | R452A                                     |
| Net weight                  | Kg / Lb         | 110 / 242                                 | 130 / 268                             | 160 / 352                                 | 180 / 396                                 |
| Crated weight               | Kg / Lb         | 180 / 396                                 | 230 / 507                             | 285 / 628                                 | 330 / 727                                 |

\* At -10°C of expansion

\*\* Data refer to internal compressor versions. The external compressors might be three-phase.

The company reserves the right to make modifications to the products without prior notice.

CIAM s.p.a. | Viale dei Pini 9 | 06081 | Petrignano di Assisi | PG - Italy | Tel: 0039 07580161

web: [www.ciamweb.it](http://www.ciamweb.it) | mail: [info@ciamgroup.it](mailto:info@ciamgroup.it)

2017 / v1.0



**CIAM**  
REFRIGERATION DESIGN

6040