



COLORS

RAL	SILVER	PANNA	CHOCHO	AZZURRO	LIMONE	LIME	AMARENA	PESCA
RAL	SILVER	RAL 9010	RAL 8014	PANTONE 285	PANTONE 394	PANTONE 383	PANTONE 233	PANTONE 165

DISPLAY TANK

RAL	S/S	WHITE CORIAL	BLACK HPL	WHITE HPL
-----	-----	--------------	-----------	-----------



FEATURES



Straight front glass hinged on silver aluminum profiles with downward opening, glass intermediate shelf, Led lighting canopy in brilliant aluminum on every display level, Glass top, Plexiglas sliding doors. Molded heat-insulated tank coated by AISI 304 s/s, ventilated refrigeration with finned evaporator and thermostatic valve, lift-up mechanism for the display plate and the evaporator with gas pistons as a guarantee of the perfect cleaning of the tank, s/s perimetral top, temperature display, digital control panel, stainless steel adjustable feet, gray galvanized-steel frame support, under-tank counter in plastic-coated steel.

6040 S3 PASTRY

SECTIONS AND MODELS

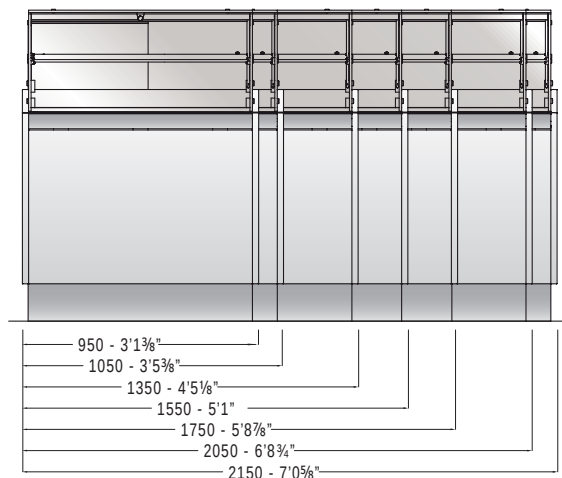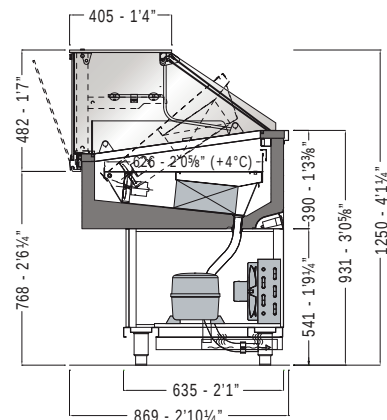

6040 S3 - PASTRY

TECHNICAL FEATURE		VERSIONS						
		900	1000	1300	1500	1700	2000	2100
External dimensions (L-D-H)	inches mm	37 3/8"-34 1/4"-49 1/4" 950 - 869 - 1250	41 3/8"-34 1/4"-49 1/4" 1050 - 869 - 1250	53 3/8"-34 1/4"-49 1/4" 1350 - 869 - 1250	61"-34 1/4"-49 1/4" 1550 - 869 - 1250	68 7/8"-34 1/4"-49 1/4" 1750 - 869 - 1250	80 3/4"-34 1/4"-49 1/4" 2050 - 869 - 1250	84 7/8"-34 1/4"-49 1/4" 2150 - 869 - 1250
Crated dimensions (L-D-H)	inches mm	43 1/4"-51 1/8"-59" 1100-1300-1500	47 1/4"-51 1/8"-59" 1200-1300-1500	59"-51 1/8"-59" 1500-1300-1500	66 7/8"-51 1/8"-59" 1700-1300-1500	74 3/4"-51 1/8"-59" 1900-1300-1500	82 5/8"-51 1/8"-59" 2100-1300-1500	90 1/2"-51 1/8"-59" 2300-1300-1500
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigerated display area	Type	Deck	Deck	Deck	Deck	Deck	Deck	Deck
Operating temperature	°C / °F	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2
Compressor	nr. / Type	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic
Cooling power *	(W)	380	420	550	610	690	850	850
Electric supply	(V/ph/Hz)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)
Power consumption	(W/A)	565/3,5	600/3,8	680/4,0	740/4,2	885/4,5	1100/6,0	1200/6,5
Defrost	Mode / type	automatic	automatic	automatic	automatic	automatic	automatic	automatic
Climatic class	N°/°C (F°)/H.R.	4/35 (95)/55%	4/35 (95)/55%	4/35 (95)/55%	4/35 (95)/55%	4/35 (95)/55%	4/35 (95)/55%	4/35 (95)/55%
Refrigerant Gas	Type	R452A	R452A	R452A	R452A	R452A	R452A	R452A
Net weight	Kg / Lb	104 / 229	115 / 253	127 / 279	142 / 313	157 / 346	167 / 368	172 / 379
Crated weight	Kg / Lb	164 / 361	185 / 407	207 / 456	232 / 511	257 / 566	283 / 623	297 / 654

* At -10°C of expansion

** Data refer to internal compressor versions. The external compressors might be three-phase.

The company reserves the right to make modifications to the products without prior notice.

CIAM s.p.a. | Viale dei Pini 9 | 06081 | Petrignano di Assisi | PG - Italy | Tel: 0039 07580161

web: www.ciamweb.it | mail: info@ciamgroup.it

2017 / v1.0



CIAM
REFRIGERATION DESIGN

6040