

6040 R5 NARROW ICE CREAM



DISPLAY TANK





COLORS



FEATURES



The outlook of the new R5 upper glass structure is the same of a welded glass structure without metal profiles. There is a double opening of glasses: the top glass can be lifted while the front glass tilts down. The structure is completed by a led light canopy and the front glass can be heated upon request. Molded heat-insulated tank coated by AISI 304 s/s, fan ventilated refrigeration air flow system oversized evaporator, reverse cycle defrost, ice-cream flavour tags with backlighting, polished brushed steel working top perimeter, digital control panel, stainless steel adjustable feet, gray galvanized-steel frame support, under-tank counter in plastic coated steel.

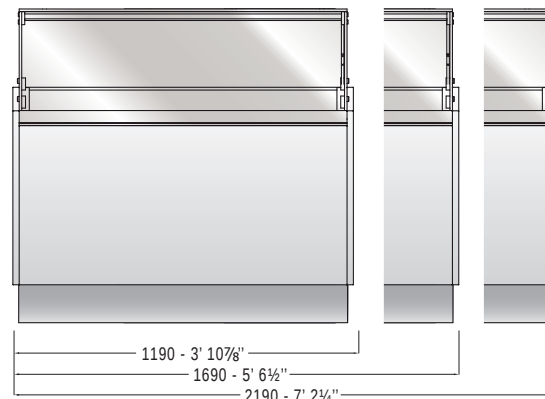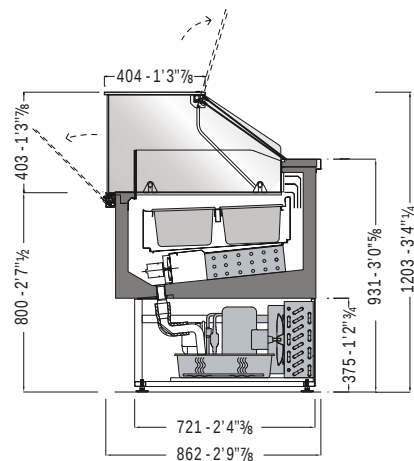

6040 R5 - NARROW ICE-CREAM

TECHNICAL FEATURE		VERSIONS			
		1150	1650	2150	2150 Double Temp.
External dimensions (L-D-H)	inches mm	46 7/8" - 43 7/8" - 49 1/4" 1190 - 1113 - 1250	66 1/2" - 43 7/8" - 49 1/4" 1690 - 1113 - 1250	86 1/8" - 43 7/8" - 49 1/4" 2190 - 1113 - 1250	86 1/8" - 43 7/8" - 49 1/4" 2190 - 1113 - 1250
Crated dimensions (L-D-H)	inches mm	59" - 53 1/2" - 59" 1500-1360-1500	74 3/4" - 53 1/2" - 59" 1900-1360-1500	90 1/2" - 53 1/2" - 59" 2300-1360-1500	90 1/2" - 53 1/2" - 59" 2300-1360-1500
Pans layout 4,2 Lt / mm. 258x165x150h 10 1/8" - 6 1/2" - 5 7/8"	flavors nr. / configuration	12	18	24	24 (12+12)
Pans layout 2,5 L / mm. 165x165x120h 6 1/2" - 6 1/2" - 4 3/4" 5,0 L / mm. 360x165x120h 14 1/8" - 6 1/2" - 4 3/4"	flavors nr. / configuration	12	18	24	24 (12+12)
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigerated display area	Type	Deck	Deck	Deck	Deck
Operating temperature	C° / F°	-18 / -0.4	-18 / -0.4	-18 / -0.4	-18 / -0.4
Compressor	nr. / Type	1 / hermetic	1 / hermetic	1 / hermetic	2 / hermetic
Cooling power *	(W)	580	790	900	570+570
Electric supply **	(V/ph/Hz)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)
Power consumption	(W/A)	1600/7,5	2000/11,5	2900/14,0	3000/15,5
Defrost	Mode / type	reverse cycle	reverse cycle	reverse cycle	reverse cycle
Climatic class	N°/°C (F°)/H.R.	4/30 (86)/55%	4/30 (86)/55%	4/30 (86)/55%	4/30 (86)/55%
Refrigerant Gas	Type	R452A	R452A	R452A	R452A
Net weight	Kg - Lb	190 - 418	230 - 507	270 - 595	300 - 661
Crated weight	Kg - Lb	310 - 683	370 - 815	450 - 992	480 - 1056

* At -33°C of expansion

** Data refer to internal compressor versions. The external compressors might be three-phase.

The company reserves the right to make modifications to the products without prior notice.

CIAM s.p.a. | Viale dei Pini 9 | 06081 | Petrignano di Assisi | PG - Italy | Tel: 0039 07580161

web: www.ciamweb.it | mail: info@ciamgroup.it

2017 / v1.0



CIAM
REFRIGERATION DESIGN